



VRX 45 AND 45-S WINCH

Best-in-class power specifically for Side x Sides

For those looking for big pulling capacity and a great value in a Side x Side winch, the WARN VRX™ 45 and VRX 45-S are the perfect choice. With all-metal construction, IP68 waterproofing, all-metal three-stage planetary geartrain, an all-new clutch design, and 4,500 lbs. of pulling power, these winches have lots of features without a premium pricetag. Great for vehicle recovery on the trails or hard work on the jobsite, these winches will help users get the big pulling jobs done.


- VRX 45 includes 50' of durable ¼" steel rope, roller fairlead, and zinc-plated hook
- VRX 45-S includes 50' of lightweight, easy-to-handle ¼" synthetic rope, hawse fairlead, and zinc-plated hook
- Huge 4,500 lb. capacity available for the hardest-working UTVs
- Load-holding brake for great control
- Durable all-metal construction
- New clutch design based on legendary WARN 4WD hub lock know-how
- Complete waterproof sealing keeps all the elements out
- Semi-gloss back powder-coated finish and stainless steel fasteners for corrosion resistance
- Smooth and reliable all-metal three-stage planetary gear train
- Dash-mounted rocker control and corded remote
- Limited lifetime warranty (mechanical), 3 year warranty (electrical)



VRX 45, PN 101045 VRX 45-S, PN 101040

WARN® VRX™ POWERSPORTS WINCHES

PREMIUM FEATURES WITHOUT THE PREMIUM PRICE

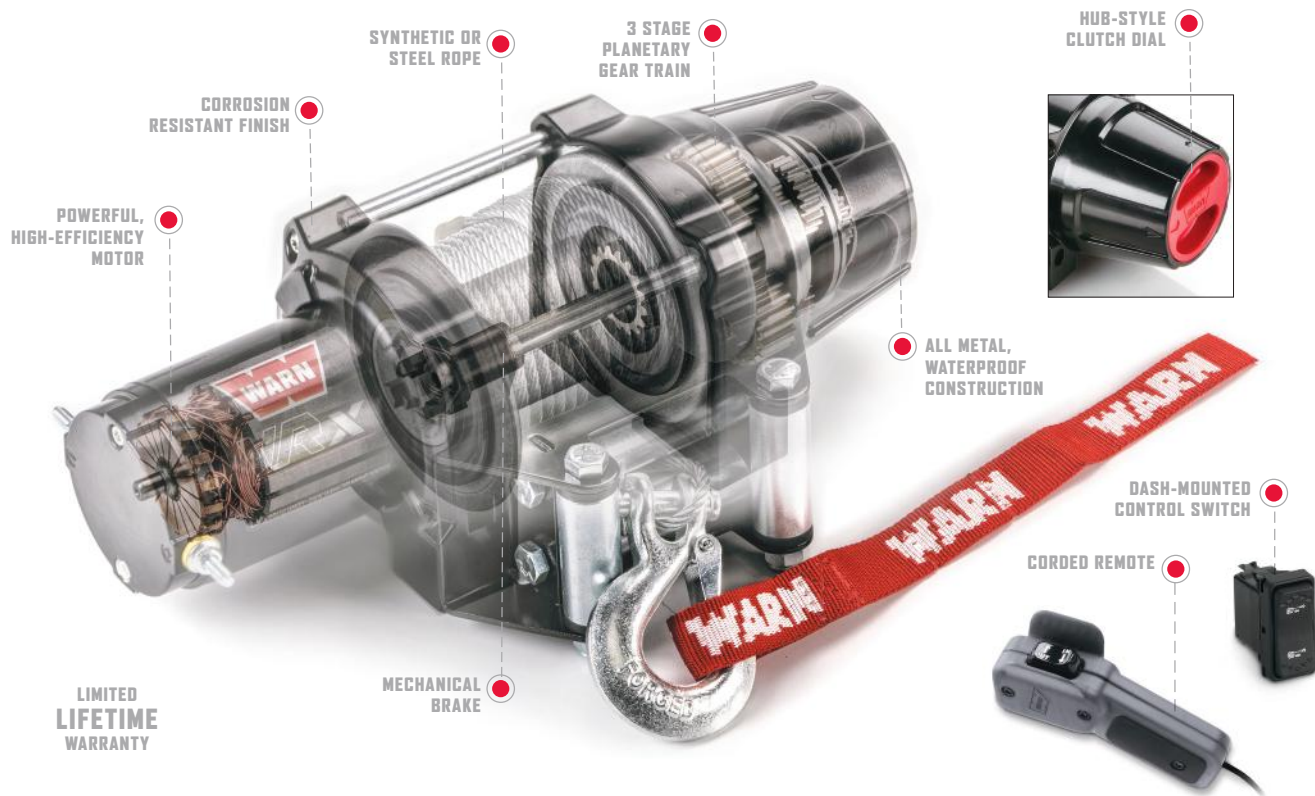

SPECIFICATIONS

Winch model: VRX 45 or VRX 45-S

Part numbers: 101045 (VRX 45), 101040 (VRX 45-S)

Rated line pull: 4500 Lbs. (2041 kg) single-line

Motor: 12V DC permanent magnet

Sealing: IP68 waterproof

Geartrain: 3-stage planetary

Fasteners: All stainless steel

Rope: VRX 45: 50' x 1/4" (15m x 6.3mm) steel,
VRX 45-S: 50' x 1/4" (15m x 6.3mm) synthetic

Hook: Zinc Plated

Fairlead: VRX 45: Roller, VRX 45-S: Cast aluminum fairlead

Primary Control: Dash-mounted control switch


Remote Control: Corded remote

Brake: Mechanical brake

Mechanical Warranty: Limited lifetime

Electrical Warranty: 3 year

Line Pull Lbs. (Kg)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs. (kg)
0	16.2 (4.9)	20 amps	1/4500 (2041)
500 (227)	14.1 (4.3)	44 amps	2/3749 (1700)
1000 (454)	12.2 (3.7)	69 amps	3/3212 (1457)
1500 (680)	10.5 (3.2)	94 amps	4/2810 (1275)
2000 (907)	9.0 (2.7)	119 amps	
2500 (1134)	7.7 (2.3)	145 amps	
3000 (1361)	6.5 (2.0)	171 amps	
3500 (1588)	5.6 (1.7)	198 amps	
4000 (1814)	4.9 (1.5)	225 amps	
4500 (2041)	4.3 (1.3)	252 amps	

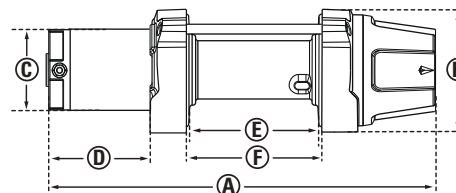

(A) 14.96" (380.2mm)	(D) 3.99" (101.4mm)
(B) 4.74" (120.5mm)	(E) 5.02" (127.6mm)
(C) 3.15" (80 mm)	(F) 5.19" (132mm)

Mounting bolt pattern: 3.0" x 6.59" (76.2mm x 167.4mm)

WARN INDUSTRIES, INC.

12900 S.E. Capps Road, Clackamas, OR USA 97015-8903 warn.com

Customer Service (North America): 1-800-543-9276 International Sales Support: +1 503 722 1200

